

810 series AC powered Pumps


Drawing, for full details please see appropriate specification sheet



The ever popular WPL 810 series peristaltic pumps are available in a range of 115v or 230v AC motor options with shaded pole gear motor and plastic cooling fan designed for operation at 25 deg C ambient temperature. Capable of delivering flow rates as high as 987 ml/min, the pump heads are polypropylene with stainless steel fasteners, self priming up to 29 ft. (8.8m), run up to 20 psi (2.7 bar), are non-siphoning and can be run dry continuously.

With peristaltic pumps the material to be pumped only comes in contact with the tubing. This is ideal for applications where the product to be moved or pumped should not touch any foreign materials e.g. when dispensing slurries, food products, chemicals, or other difficult to handle fluids. The 810 peristaltic pumps can handle a wide variety of viscosities, from air and gases to heavy slurries, with a consistent positive displacement. It is available in 2 roller (powdered iron with nylon rollers and bronze bearings) or 3 roller (plastic with acetal rollers) assemblies. These attach directly to the motor output shaft, delivering a precise amount of the product with each revolution.

The easiest way to place an order is via our online shop at <http://www.williamson-shop.co.uk> but please contact us for any requirements not listed or to place an order over the phone.

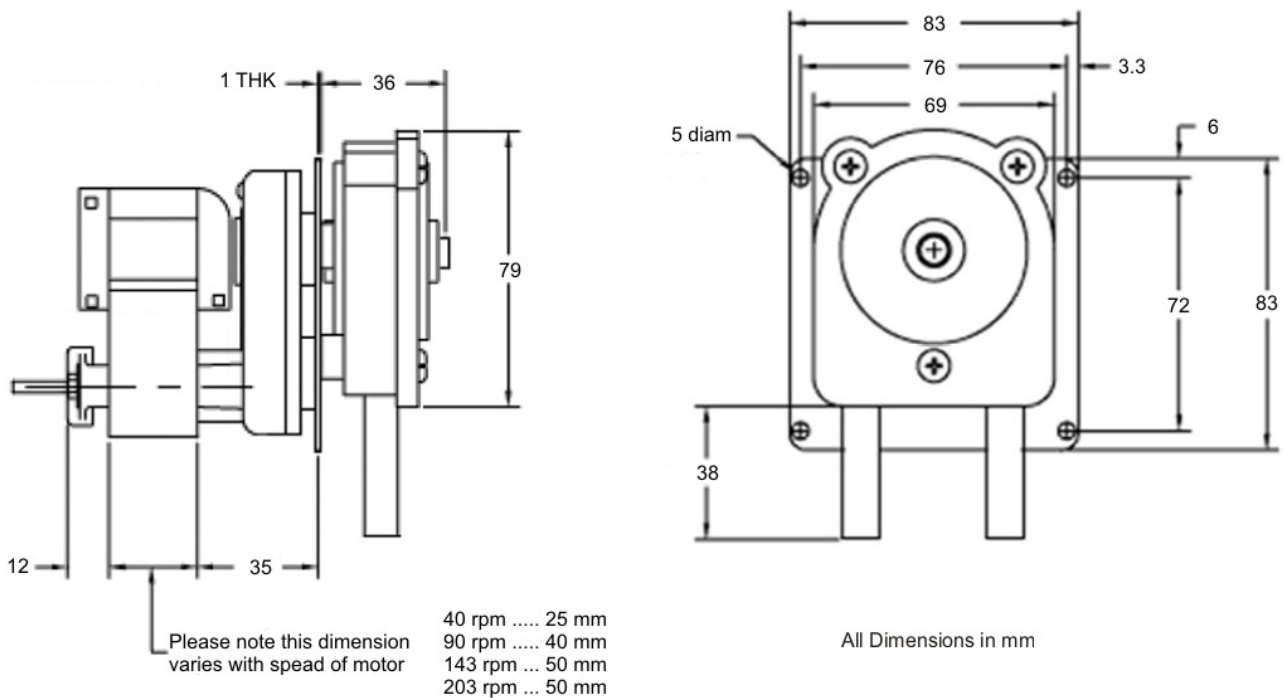

The Williamson Manufacturing Company Ltd provides no warranty on usage of pumps. We recommend that life tests be carried out prior to use. This information is given in good faith and believed to be correct and current at time of publishing. The Williamson Manufacturing Company Ltd cannot accept responsibility for its inaccuracy or any errors or omissions contained herein. Copyright The Williamson Manufacturing Company Ltd 2008